
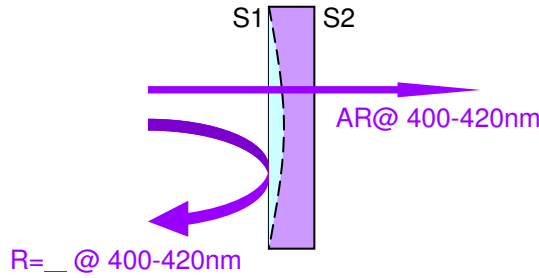


Output Laser Cavity Mirror @ 400-420nm (0° AOI)  
**PMO-(400-420)A Series**



Ø25.4	6
Ø12.7	3

ORDERING INFORMATION:	PMO	-	(400-420)A	-	Diameter (mm)	-	Thickness (mm)	-	Radius (mm)	-	Reflection (S1)(%)
									Flat		99.5
									-50		98.0
									-100		96.0
									-200		94.0
									-300		92.0
									-400		90.0
									-500		85.0
									-900		80.0
									-1000		75.0
									**		70.0
											**

General Specifications:	
Substrate Material:	BK7 Glass
Flatness:	$\lambda / 10$ at 633nm
Surface Quality:	10-5 scratch and dig
Diameter Tolerance:	+ 0.00mm, - 0.10mm
Thickness Tolerance:	$\pm 0.10$ mm
Wedge:	$\leq 5$ minutes
Chamfer:	0.2mm at 45° typical
Concentricity:	$\leq 0.05$ mm
Radius Tolerance:	$\pm 0.5\%$
Coating Technology:	Electron beam multilayer dielectric
Adhesion and Durability:	Per MIL-C-675C. Insoluble in lab solvents
Clear Aperture:	Exceeds central 85% of dimension
Damage Threshold:	1MW/cm <sup>2</sup> CW, 5J/cm <sup>2</sup> (10ns Pulse)
Coating (0° AOI)	S1: R @ 400 ~ 420nm S2: AR @ 400~ 420nm

\*\* Upon request

**Contact Information:**

**PHOTONIK (SINGAPORE) PTE LTD**

8 Boon Lay Way, TradeHub 21, #04-04, Singapore 609964  
 Tel: +65-6316-6370, +65-6316-2142 Fax: +65-6316-1082  
 Email: sales@photonik.com.sg Web: www.photonik.com.sg

**Local Representative:**