
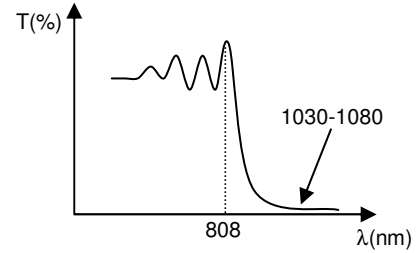
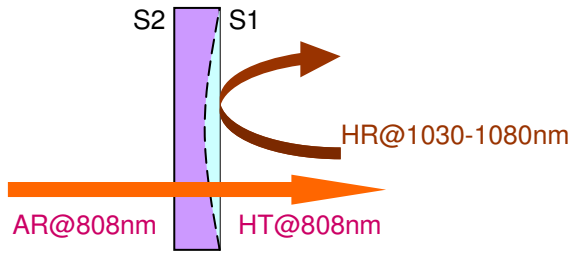


808nm Input Mirror for DPSS Laser Cavity (0° AOI)
 1030 - 1080nm High Reflection
PMI-808A-1064B Series



ORDERING INFORMATION:	PMI	-	808A	-	1064B	-	Diameter (mm)	-	Thickness (mm)	-	Radius (mm)
------------------------------	------------	---	-------------	---	--------------	---	----------------------	---	-----------------------	---	--------------------

General Specifications:	
Substrate Material:	BK7 Glass
Flatness:	$\lambda / 10$ at 633nm
Surface Quality:	10-5 scratch and dig
Diameter Tolerance:	+ 0.00mm, - 0.10mm
Thickness Tolerance:	± 0.10 mm
Wedge:	≤ 5 minutes
Chamfer:	0.2mm at 45° typical
Concentricity:	≤ 0.05 mm
Radius Tolerance:	$\pm 0.5\%$
Coating Technology:	Electron beam multilayer dielectric
Adhesion and Durability:	Per MIL-C-675C. Insoluble in lab solvents
Clear Aperture:	Exceeds central 85% of dimension
Damage Threshold:	1MW/cm ² CW, 5J/cm ² (10ns Pulse)
Coating (0° AOI)	S1: HR @ 1030 ~ 1080nm (R>99.5%) HT @ 808nm (T > 98%) S2: AR @ 808nm (R < 0.25%)

Ø12.7	3	Flat
Ø25.4	6	-50
Ø50.8	**	-100
**		-200
		-500
		-1000
		+50
		+100
		+200
		+500
		+1000
		**

** Upon request

Contact Information:

PHOTONIK (SINGAPORE) PTE LTD

8 Boon Lay Way, TradeHub 21, #04-04, Singapore 609964
 Tel: +65-6316-6370, +65-6316-2142 Fax: +65-6316-1082
 Email: sales@photonik.com.sg Web: www.photonik.com.sg

Local Representative: