
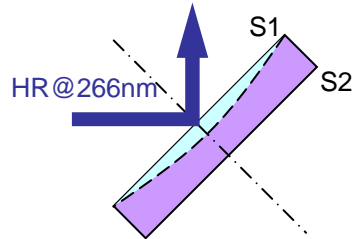


High Reflection Laser Cavity Mirror  
 @ 266nm (45° AOI)  
**PM-R266B Series**



ORDERING INFORMATION:	PM	-	R266B	-	Diameter (mm)	-	Thickness (mm)	-	Radius (mm)
					Ø12.7		3		Flat
					Ø25.4		6		-50
					Ø50.8		**		-100
					**				-200
									-500
									-1000
									**

General Specifications:	
Substrate Material:	BK7 Glass
Flatness:	$\lambda / 10$ at 633nm
Surface Quality:	10-5 scratch and dig
Diameter Tolerance:	+ 0.00mm, - 0.10mm
Thickness Tolerance:	$\pm 0.10$ mm
Wedge:	$\leq 5$ minutes
Chamfer:	0.2mm at 45° typical
Concentricity:	$\leq 0.05$ mm
Radius Tolerance:	$\pm 0.5\%$
Coating Technology:	Electron beam multilayer dielectric
Adhesion and Durability:	Per MIL-C-675C. Insoluble in lab solvents
Clear Aperture:	Exceeds central 85% of dimension
Damage Threshold:	1MW/cm <sup>2</sup> CW, 5J/cm <sup>2</sup> (10ns Pulse)
Coating (45° AOI)	S1: HR @ 266nm (R>99.5%)

\*\* Upon request

**Contact Information:**

**PHOTONIK (SINGAPORE) PTE LTD**  
 German Center, #04-102  
 25 International Business Park  
 Singapore 609916  
 Tel: (65) 6562-7838, 6562-7976 Fax: (65) 6562-7839  
 Email: sales@photonik.com.sg Web: www.photonik.com.sg

**Local Representative:**