


VIS-NIR LINEAR POLARIZER

(Glass-Sheet Type, 600-1200nm)

Material	Nanoparticle sheet
Spectral range	VIS-NIR
Wavelength range with contrast > 100 000 : 1 ⁽¹⁾	900 to [1150] nm
Transmittance (with antireflection coating)	> 87 % up to 93 %
Wavelength range with contrast > 10 000 : 1 ⁽¹⁾	750 to [1150] nm
Transmittance (with antireflection coating)	> 87 % up to 93 %
Wavelength range with contrast > 1 000 : 1 ⁽¹⁾	650 to [1150] nm
Transmittance (with antireflection coating)	> 86 % up to 93 %
Filter size	up to 50x30 mm ²
Filter thickness ⁽²⁾	220 ± 25 µm
Acceptance angle	± 20°
Polarization axis	< 0.5° to indicated edge
Operating temperature	-50 to +400 °C
⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance	
⁽²⁾ other thicknesses on request	
P/N: POL001-A09M	Dia: 1 Inch, Mounted (Clear Aperture: >=9mm)
P/N: POL001-A21M	Dia: 1 Inch, Mounted (Clear Aperture: >=21mm)

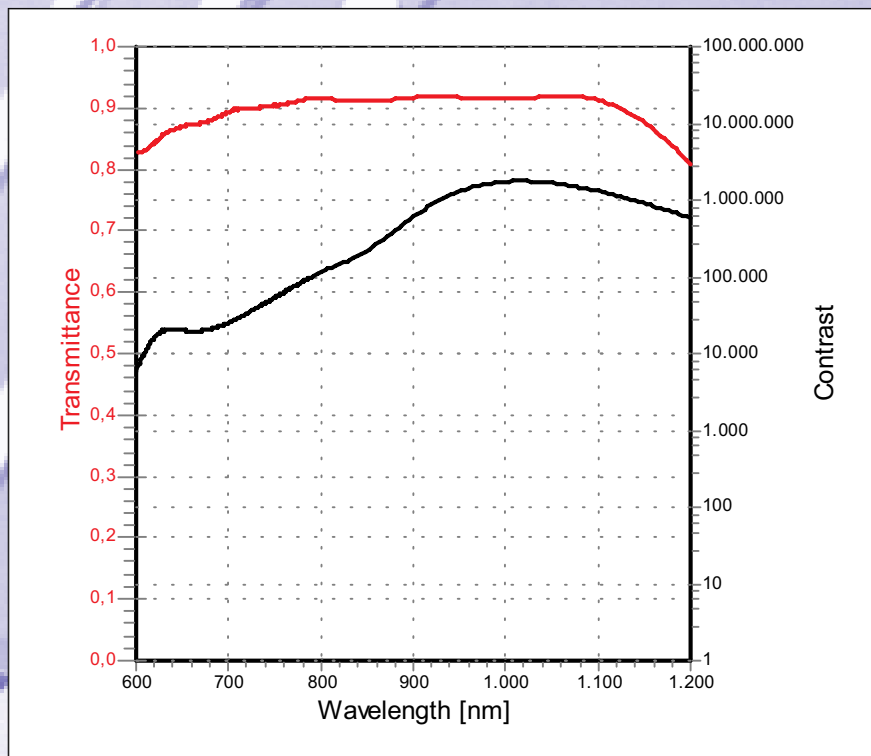

PHOTONIK (SINGAPORE) PTE LTD

German Center, #04-102
 25 International Business Park
 Singapore 609916

Contact Information:

Tel: +65 6562 7839
 Fax: +65 6562 7839
 Email: sales@photonik.com.sg
 Web: www.photonik.com.sg