

Glass Sheet Polarizer	
colorPol[®] VISIR 003550	
linear VIS-NIR-polarizer	Date: 23.06.2006


Wavelength range with **contrast > 100 000 : 1**
 (Contrast = ratio of parallel and perpendicular transmittance)
 Transmittance (uncoated)

600 to 1200 nm
 > 67 % up to 84 %

Wavelength range with **contrast > 10 000 : 1**
 Transmittance (uncoated)

550 to 1500 nm
 > 57 % up to 85 %


Spectral response

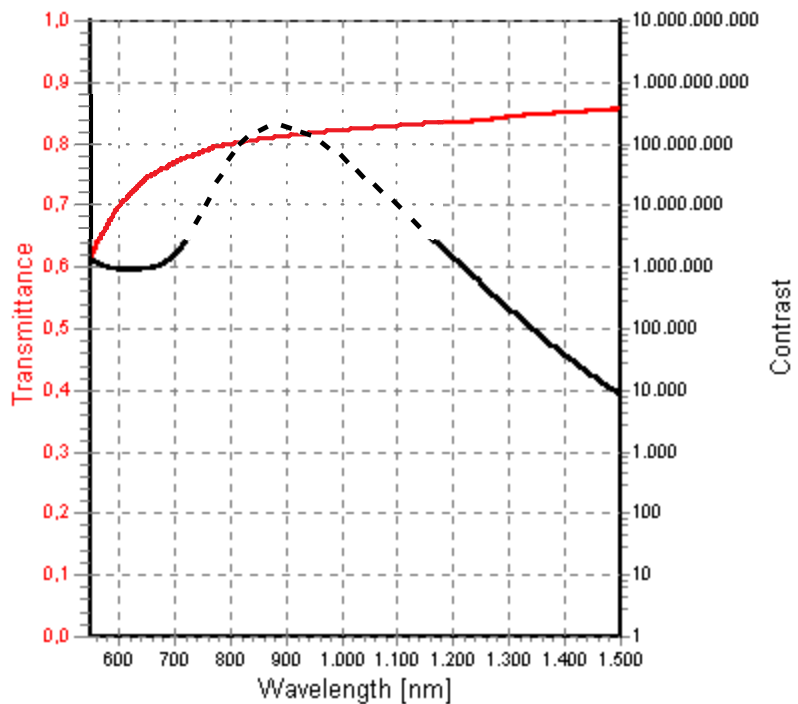

Filter thickness

260 ± 50 µm

Filter size



→ Polarization (electric field vector of transmitted light)

Clear aperture

90 % of surface dimension

Polarization axis

< 0,5° to indicated edge

Acceptance angle

± 20°

Operating temperature

-50 .. +400 °C

Contact Information:

PHOTONIK (SINGAPORE) PTE LTD

German Center, #04-102
 25 International Business Park
 Singapore 609916
 Tel: +65 - 6562 7838 Fax: +65 - 6562 7839
 sales@photonik.com.sg www.photonik.com.sg

Local Representative:

